



EMEROX® Polyols in rigid foam applications

EMEROX Polyols are engineered for performance and sustainable by nature. Our branched, renewable polyester polyols provide formulators and end-users with enhanced performance properties, increased efficiencies, and sustainability. They are excellent low viscosity and high renewable content raw materials for use in the manufacture of polyurethane rigid foams.

This family of aliphatic EMEROX Polyols is engineered to perform similarly to sucrose glycerin polyether polyols in typical rigid foam applications. Foams prepared with EMEROX Polyols exhibit excellent compressive strength and dimensional stability properties, and by virtue of a hydrophobic backbone structure, provide lower water absorption and better water displacement in field applied foams, such as geotechnical applications, versus equivalent sucrose glycerin polyether polyols.

PRODUCT NAME	HYDROXYL VALUE	VISCOSITY cP @25°C	FN (Calc.)	BIO-BASED CONTENT (%)	APPLICATION DESCRIPTION
EMEROX® I 4270	355	1,800	2.7	99*	Hydrophobic polyol with excellent compressive strength. SG 360 polyether alternative.
EMEROX® I 4280	280	3,700	2.7	99*	Lower hydroxyl version of EMEROX I 4355. Used for H ₂ O blown formulations.
EMEROX® I 4355	355	1,800	2.7	99*	Hydrophobic polyol with excellent compressive strength. SG 360 polyether alternative. Ideal for PUR field applications.
EMEROX® I 4371	370	15,000	3.7	99*	High function version of EMEROX I 4355. Used for PUR and spray foam applications. Alternative to SG 370.
EMEROX® I 4375	365	1,600	2.9	99**	A highly branched, natural-based polyester polyol. Used for rigid polyurethane PiP, spray, and packaging foam applications.



*USDA Certified Biobased Product.



** Product not evaluated by USDA yet.

Key Benefits

Aliphatic EMEROX® Polyols for rigid foams are designed as a highly hydrophobic, bio-based alternative to sucrose glycerin (SG) polyether polyols.

Hydrophobicity

When foamed under water, the EMEROX® Polyol-based system foamed out of the water (leaving the water clear) and provided a density much closer to the product foamed under dry conditions.

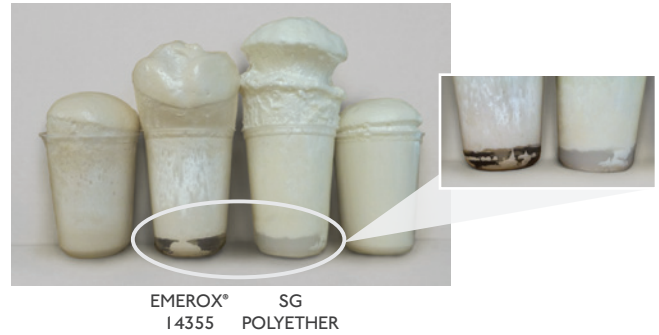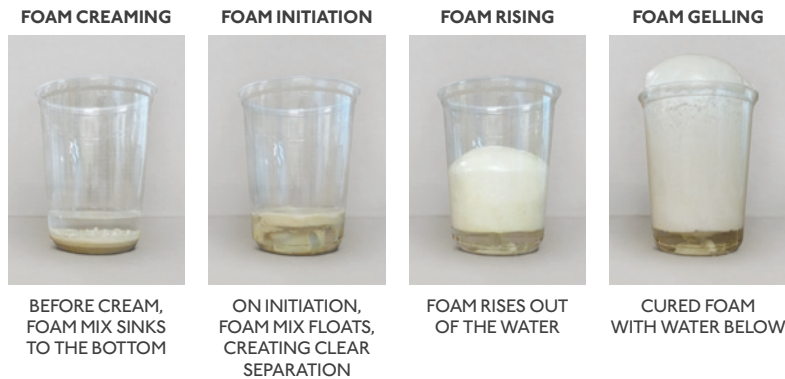


Video: See how EMEROX® Polyols perform in geotechnical applications



Normalized Compression Strength

"Generic" 2.0 pcf Closed Cell Spray Foam with H₂O

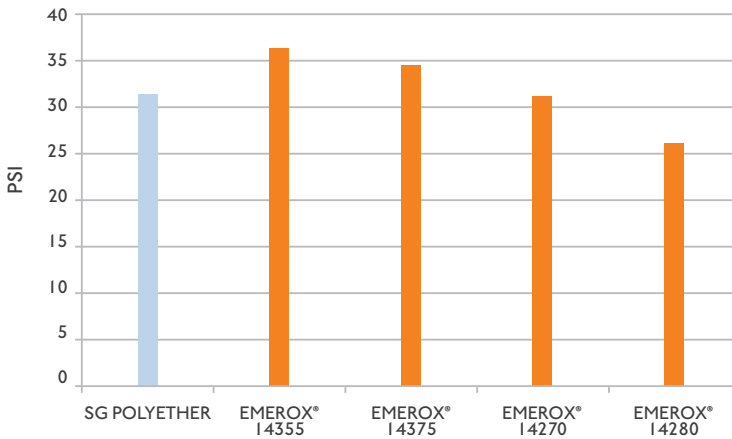

EMEROX® Polyols demonstrate excellent compression strength and dimensional stability properties compared to SG polyether.

Fire Performance

Cross sections of foam after burning show positive swelling benefits of the EMEROX® Polyols versus shrinkage from the SG polyether.



SG POLYETHER (SHRINKAGE)

EMEROX® 14270 (SWELLING)

To request a sample or to find out more about our aliphatic EMEROX® Polyols for rigid foam, contact Polyols@emeryoleo.com or visit www.emeryoleo.com/polyols

Disclaimer: The content in this document is provided on an "as is" and "as available" basis purely for informational purposes and, unless and to the extent specifically agreed otherwise for a sales transaction, does not constitute any warranty, whether express, implied or statutory, including but not limited to warranties or guarantees of merchantability, fitness or suitability for a particular purpose nor any representations of a binding nature. EMERY OLEOCHEMICALS EXPRESSLY DISCLAIMS ANY RESPONSIBILITY FOR THE SUITABILITY OF THE PRODUCTS FOR ANY SPECIFIC OR PARTICULAR PURPOSES INTENDED BY THE USER. Suggestions for the use and application of the products and guide formulations are for informational purposes only and you are advised to carry out any necessary steps to test the suitability of the products for your intended processes and purposes. You are solely responsible for compliance with all applicable laws and regulations in use of the products including any third party intellectual property rights and shall bear all liability or risk arising from use of the products. ALL indications marked with a TM or ® symbol are trademarks belonging to legal entities within the Emery Oleochemicals group of companies.